



CUSTOMER INFORMATION

Super Rock

Description:

An outstanding combination of Kevlar® fibre and a tough nitrile coating makes our Super Rock Gloves a hard working, reliable solution for many demanding handling tasks such as metal and glass handling.

- Conforms to EN 388 levels 4-5-4-4
- Enhanced cut resistance
- Enhanced abrasion resistance
- Elasticated knit wrist
- Good dexterity

Fabric:

- 10 gauge Kevlar fibre
- Grey nitrile palm coat

Applications:

Tasks with general handling, construction, glass/metal handling, transportation/shipping, agricultural

Colourways:



Blue/Yellow

Product Codes:

71161-5 One Size Super Rock Grey/Yellow

Standards:




EN 388



Abrasion: 4
Blade Cut: 5
Tear: 4
Puncture: 4

EC Council Directive 89/686/EEC
BS EN 420:2003+A1:2009 - Sizing & Dexterity: PASS
BS EN 388:2003 - Protection Against Mechanical Hazards



Size Chart:


Measurements in mm	7 (S)	8 (M)	9 (L)	10 (XL)	11 (2XL)
Hand Length (A)	171	182	192	204	215
Hand Circumference (B)	178	203	229	254	279

Issue No.: 2

Issue Date: 19/09/2014

Packaging: 12 pairs per bag - 10 bags per case

Outer Carton Artwork:

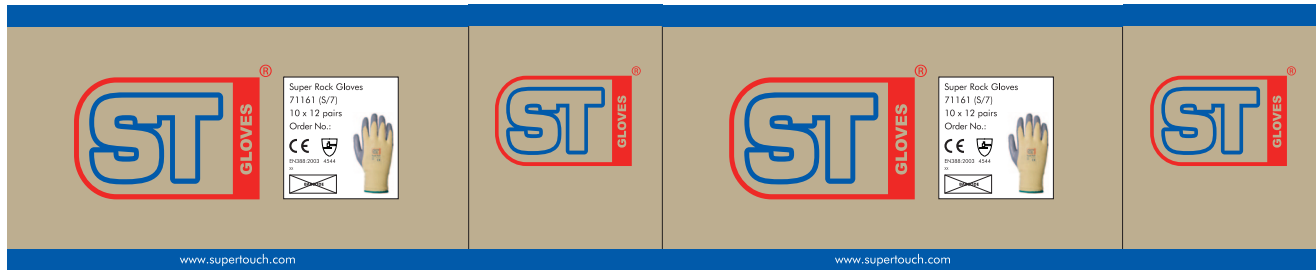

Inner Artwork:

- SMALL
- MEDIUM
- LARGE
- X LARGE
- 2X LARGE

BULKY

SUPER ROCK

100% Kevlar® With Nitrile Palm Coating

Certification Body: SATRA Technology Centre, Kettering, Northants, NN16 9JQ, UK

CE
CAT II

These products are classified as Personal Protective Equipment for the European PPE Directive 89/686/EEC. **CAREFULLY READ INSTRUCTIONS BEFORE USE**

This product is designed to provide protection against mechanical risks. No form of PPE can provide 100% protection - one must always be aware whilst carrying out the activity.

EN 420:2003+A1:2009 Protective Gloves - General Requirements

Fitting & Sizing: Do not wear products of a suitable size. Products which are either too loose or too tight will reduce movement and will not provide the optimum level of protection.

Storage & Transport: Store the product in a well-ventilated area away from sources of temperature & strong odours.

Inspection: Before & After Use: Examine and make-up damage products before use. If in doubt consult manufacturer.

Cleaning: It is recommended that this product should not be washed or dry-cleaned.

EN 388:2003 Protective Gloves Against Mechanical Risks

Use	Level 1 (Minimum)	Minimum Level
abrasion Resistance	4	(H)
tear Resistance	2	(H)
cut Resistance	2	(H)
Puncture Resistance	4	(H)

Note: Performance levels apply to the palm area of the hand.

Warning: These gloves will not prevent crushing, falling, or similar exposures when used in or near circumstances by moving parts of machinery.

4544

This product is supplied under control. Certified to meet the requirement of ISO 9001.

www.supertouch.com XX

Unit A1 Hubert Road, Brentwood, Essex, CM14 4JE

The information shown on this specification sheet is intended as a guide and is advisory only. All details were correct at the time of issue. As conditions of use are ultimately beyond our control, we advise that the product is tested for the particular application before use.