

LEONE™

Elegance & performance to deliver an optimal safety spectacle. Perfectly contoured for optimal fit without pressure. A 9 base curve providing excellent side coverage and maximum peripheral vision. Forget safety, enjoy the fit and features of stylish protective eyewear!

WEIGHT

24g

LENS

- Large field of vision
- Optimal coverage
- Twin lens design
- Available in Photochromic and polarized versions



FRAME

- Polycarbonate frame
- Stylish design
- Available in Carbon design finish



- + DESIGN
- + VARIO & POLARIZED LENSES
- + CARBON DESIGN



Reference	Lens Markings	Frame Markings	Lens Treatment	Conformity
1LEO23C	2C-1.2 1FT KN CE	EN 166 FT CE	Anti-scratch/Anti-fog (KN)	EN 166 EN 170
1LEO23S	5-2.5 1FT KN CE	EN 166 FT CE	Anti-scratch/Anti-fog (KN)	EN 166 EN 172
1LEOCARB23S	5-2.5 1FT KN CE	EN 166 FT CE	Anti-scratch/Anti-fog (KN)	EN 166 EN 172
1LEOCARB21SPOL	5-3.1 1FT CE	EN 166 FT CE	Anti-scratch	EN 166 EN 172
1LEO21SVAR	5-1.4<2 1 FT CE	EN 166 FT CE	Anti-scratch	EN 166 EN 172


For Lens & frames markings details, please refer to pages 7 to 9 in Swiss one catalogue.
For Lens technologies and colors details please refer to pages 10 to 12 in Swiss one catalogue.

LEONE™



DIMENSIONS OF SPECTACLE

Lens Thickness:	1.8mm
Lens Base:	9
Lens Size (Diagonal):	71.0mm
Bridge:	-
Temple Length (Lens to tip):	167.0mm
Overall Width:	131.0mm
Closest point between temple tips:	95 +/- 3mm

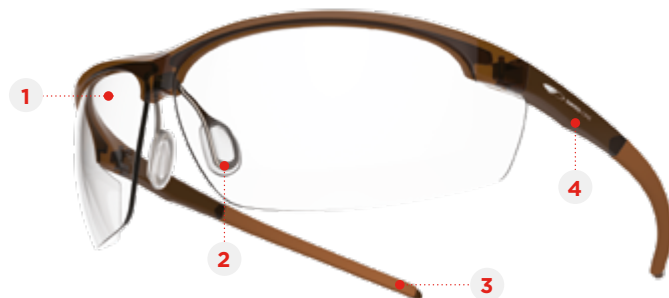

- 1 Polycarbonate
- 2 TPR
- 3 TPE
- 4 Polycarbonate

INSTRUCTIONS FOR USE

- In use ensure that the safety spectacles fit comfortably and securely on the head
- Ensure that the safety spectacles are in place, before entering the hazard area

CLEANING & MAINTENANCE

- The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth
- Do not clean with chemical or abrasive cleaners
- The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature

LIMITATIONS OF USE

- Protection will only be offered if the safety spectacles are fitted correctly
- If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately
- Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer
- The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice
- The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer
- Leone™ is not suitable for protection against dusts, liquids or molten metals

DIMENSIONS OF INNER PACKAGING


Quantity:	10
Weight:	0.52kg



- H Height: 96mm
- L Length: 191mm
- W Width: 284mm

DIMENSIONS OF OUTER PACKAGING

Quantity:	300
(30 display boxes of 10 p)	
Weight: (Approx.)	17.7kg



- H Height: 63cm
- L Length: 98.5cm
- W Width: 30cm

Reference	EAN barcode Unit	EAN barcode inner packaging	EAN barcode outer packaging	Country of origin
1LEO23C	5038428243971	5038428325165	5038428288170	Taiwan
1LEO23S	5038428243988	5038428325172	5038428288187	Taiwan
1LEOCARB23S	5038428243995	5038428325226	5038428288200	Taiwan
1LEOCARB21SPOL	5038428244008	5038428325189	5038428288194	Taiwan
1LEO21SVAR	5038428320917	5038428320924	5038428320931	Taiwan