

# STEALTH 9000™ POLARISED SMOKE HARDIA+™ ANTI-SCRATCH LENS

## TECHNICAL SPECIFICATION

PRODUCT CODE: ASA770-16X-600

EYE & FACE PROTECTION

LIGHTWEIGHT SAFETY SPECTACLE WITH A WRAPAROUND 9 BASE CURVE POLARISED LENS

# STEALTH 9000

### INSTRUCTIONS FOR USE

In use ensure that the safety spectacles fit comfortably and securely on the head  
Ensure that the safety spectacles are in place, before entering the hazard area



### STEALTH 9000™ FEATURES & PERFORMANCE

A lightweight safety spectacle with dual Wraparound 9 base curve Polarised Polycarbonate lens

The slim stylish temples have been co-injection moulded with soft rubber to increase grip and provide excellent comfort levels

Optical Class 1 lenses are polarised to stop horizontal glare, protecting against eyestrain

Offers a better perception of contrast in bright environments

Ideal for outdoors applications around reflective surfaces (water / offshore / ports / driving)

UVA, UVB and UVC protection

Tested to resist the impact of a 6mm steel ball fired at 100mph (160kph) at the lens

Adjustable Nose Piece: The soft nose bridge is adjustable and provides high grip fitting that prevents slippage

Strong Performance: Superior hard-coated class 1 optics available in a range of shades to suit many applications

Includes a pouch for carrying and cleaning lens

Anti-scratch lens coating



### CLEANING & MAINTENANCE

The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature

### CONFORMITY

Conforms to EN 166.1.F.K & EN 172  
EC Certificate Number 726, issued by Inspec Certification Limited



MANUFACTURING FOR SAFETY  
WWW.JSP.CO.UK

UKSALES@JSP.CO.UK  
TEL: +44 (0)1993 826050



# STEALTH 9000™ POLARISED SMOKE HARDIA+™ ANTI-SCRATCH LENS

## TECHNICAL SPECIFICATION

PRODUCT CODE: ASA770-16X-600

**EYE & FACE PROTECTION**

LIGHTWEIGHT SAFETY SPECTACLE WITH A WRAPAROUND 9 BASE CURVE POLARISED LENS

### DIMENSIONS OF INNER PACKAGING

Quantity: 1  
 Weight: 26g (Approx.)



# STEALTH 9000


**HEIGHT:**  
70mm

**WIDTH:**  
55mm

**LENGTH:**  
150mm

### DIMENSIONS OF OUTER PACKAGING

Quantity: 120  
 Weight: 3.7kg (Approx.)

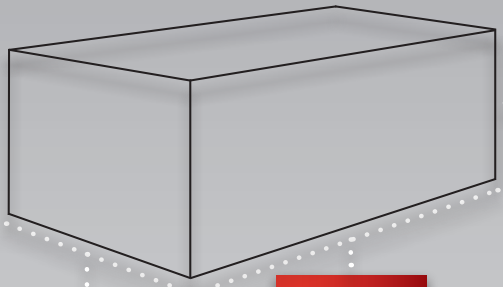

**HEIGHT:**  
377mm

**WIDTH:**  
315mm

**LENGTH:**  
545mm

### MARKINGS

Frame: EN166 1.F  
 Polarised Lens: 5-3.1 ↑ 1.F K

### DIMENSIONS OF SPECTACLE

Lens Thickness: 2.3mm  
 Lens Base: 9.5mm curve  
 Lens Size (Vertical): 42mm  
 Lens Size (Diagonal): 82mm  
 Bridge: 14mm  
 Temple Length (Lens to tip): 158mm  
 Overall Width: 138mm  
 Closest point between temple tips: 94mm  
 Weight: 25g (Approx.)

### LIMITATIONS OF USE

Protection will only be offered if the safety spectacles are fitted correctly

If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

The Stealth 9000™ is not suitable for protection against dusts, liquids or molten metals



MANUFACTURING FOR SAFETY  
 WWW.JSP.CO.UK

UKSALES@JSP.CO.UK  
 TEL: +44 (0)1993 826050

